


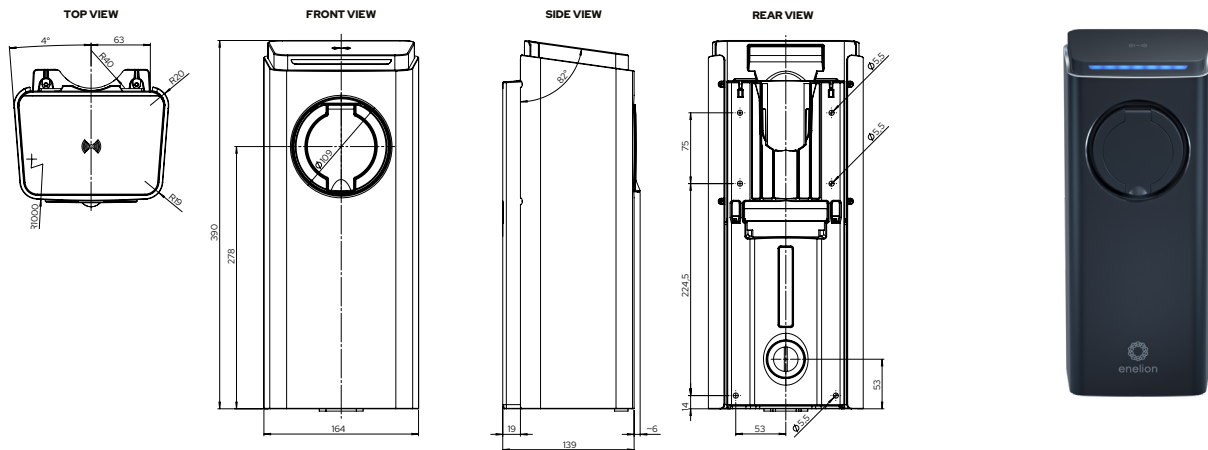

ENELION LUMINA

TECHNICAL SPECIFICATION

Housing	Polycarbonate, anodized aluminum*
Ingress protection rate	IP54
Impact protection	IK10
Flammability class	UL94-V0
Charging connector type	- ENELION LUMINA Socket – Type 2 socket - ENELION LUMINA Cable – Type 2 connector with 5.2 m cord
Residual current protection	Embedded residual current monitor – Enelion RCMB 6 mA DC
Energy metering	Integrated 3-phase energy meter > 99% accuracy
Certified electricity meter (MID)	Impulse* – possible to install inside the housing
User interface	- multi-color LED strip that indicates the status of the device - dedicated app connecting station via WiFi AP 2.4 GHz b/g/n
Online communication unit	- integrated LTE/4G modem - Wi-Fi 2.4 GHz b/g/n – direct access point to the station with an option to hide the AP and connect the station to local Wi-Fi network
Minimal signal quality requirements	- Wi-Fi: -60 dBm - GSM: -85 dBm
OCPP	compliance with OCPP 1.6 J protocol
Authorization	- built-in RFID/NFC reader – Mifare Classic/ ree Charge - dedicated app connected via WiFi AP 2.4 GHz b/g/n
Current/Charging power	- up to 74 kW at 32 A 1-phase - up to 22 kW at 32 A 3-phase (TN system)
Charging voltage	3 x 400 V AC/230 V AC (±10%)
Supply voltage	3 x 400 V AC/230 V AC (±10%) (TN/IT) - possibility of connecting the cable from the top, bottom and the back of the station
Other features	- configuration with no additional tools - remotely controlled schuko outlet (max. 2000 W/10 A)* - remote start / stop, delay and charging schedule - temperature and humidity monitoring inside device
Operating temperature	From -30°C to +55°C
Maximum altitude for installation	2000 m
Height	390 mm
Depth	133 mm
Width	155 mm
Weight	3.3-8.9 kg (depending on device version)
Compliance	2014/53/EU (RED); 2011/65/EU (RoHS); 2014/30/EU (EMC); 2014/35/EU (LVD); UK SI 2016 No. 1101; UK SI 2016 No. 1091; UK SI 2017 No. 1206; UK SI 2012 No. 3032 The following BSI and ETSI technical standards and specifications have been applied: ETSI EN 300 328 V2.2.2:2020-03; EN 62196-2:2017-06; EN IEC 61851-1:2019-10; EN IEC 61851-21-2:2021-09; EN 62196-1:2015-05; ETSI EN 301 511 V2.5.1:2017-10; ETSI EN 300 330 V2.1.1:2017-08; ETSI EN 301 489-1 V2.2.3:2020-07; ETSI EN 301 489-17 V3.2.4:2021-05

*option

REV 03-2023



ENELION sp. z o.o. | 50 Pana Tadeusza St
80-123 | Gdansk | Poland

sales@enelion.com

enelion.com